



HOUSTY ELEGANT

HE

HOUSTY ELEGANT

Housty Elegant Series Screw-Driving
Homelift interprets elegance and 'LIFT'
artistic life.



HE

Standard Model

Platform Screw Drive Homelift

- European core technology with imported new-generation screw and nut drive system
- No machine room or pit required, comes with a self-contained panoramic shaft for flexible installation
- Embedded handrails and half-height background wall design for more customization possibilities



Nut&Screw
Drive




Craftsmanship
Quality



High-end
Customization



Extraordinary
Design

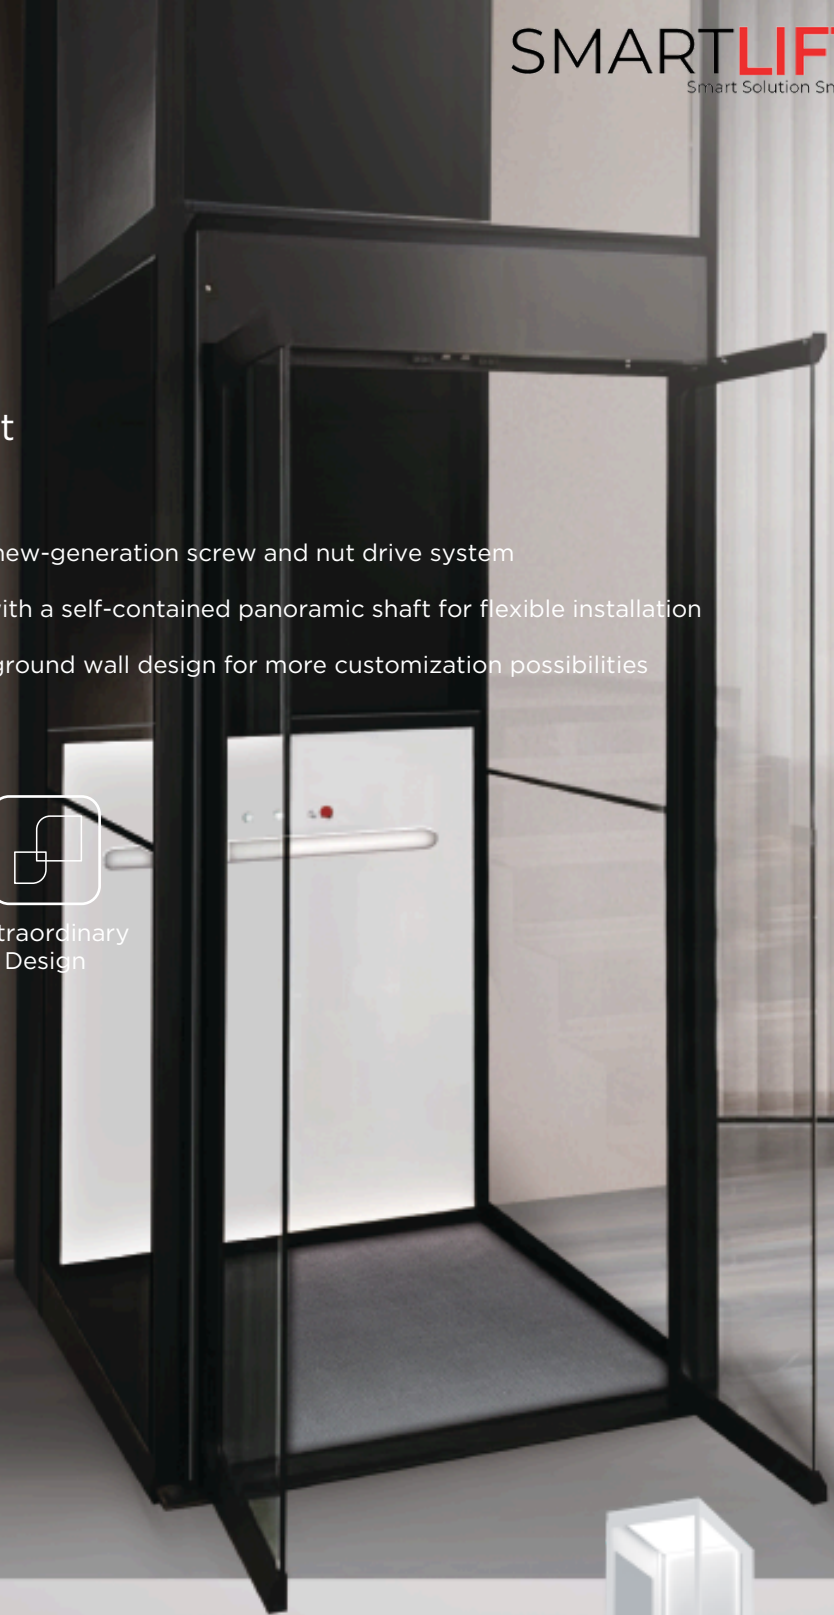

“ An essential home decor piece
for houses ”

Imported
Nut&
Screw

6

screw
threads

30

years design life of
the whole machine

0

Ladder fall risk

USP

uninterruptible power
supply 24 hours "extra
long standby"



HE Pro

Four-Sided Panoramic Model
Platform Screw Drive Homelift

Enhanced version based on the standard model.

Full-view four-sided glass design
Enjoy outdoor scenery to the fullest



“Combines sightseeing and lighting in one step,
a true 360-degree panoramic view lift”

Panoramic

**Imported
Nut & Screw**

6
screw
threads

30
years design life
of the whole
machine

0
Ladder fall
risk

USP
uninterruptible power
supply 24 hours
“extra long standby”



HE Plus (door size 1400-1800mm)

Half-Height Door Model

Platform Screw Drive Homelift

Further upgraded based on the standard model

Customizable half-height door to address top floor height issues



“ Customized specifically for top floor spaces with height limitations ”

Half-Height Door
(1400-1800mm)

Imported Nut & Screw

6
screw threads

30
years
design life of the
whole machine

0
Ladder fall risk

USP
uninterruptible power
supply 24 hours
"extra long standby"



How to choose your homelift ?

HE



HE Pro



HE Plus



Name	Standard	Four-Sided Panoramic Model	Half high door style
Panoramic View	Three sides	Four Sides	Three/four sides
Speed	0.15/0.3 m/s	0.15/0.3m /s	0.15/0.3 m/s
Color			
Opening method	Single door/double door	Single door/double door	Single door (top floor) Double doors are optional for other floors
Call button	Standard/fingerprint/face recognition	Standard/fingerprint/face recognition	Standard/fingerprint/face recognition
Background Wall	Standard/personalized pattern	Standard/personalized pattern	Standard/personalized pattern
Equipment Panel	Steel Plate	Glass	Glass(optional)
Top light	No Panoramic View Overhead light	Overhead Light	No Top, Open Design
Door height	2000mm	2000mm	Semi-high door 1400-1800mm
Shaft Lighting	Standard light	128 RGB Colors Available	No ceiling light
Equipment Panel Glass Frame	No	Ultra-Narrow	Ultra-Narrow
Screw	invisible	visible	Visible/ invisible

Opening method	Lifting speed	Calling ladder	Background	Shaft	Door height	sightseeing
Default single door Optional double doors	Default 0.15 m/s Optional 0.3 m/s	Default auto call Optional fingerprint call	Default Standard Wall Optional Customized Wall	Glass shaft Steel plate shaft	2000mm 1400-1800mm	All sides Three sides

- Upgraded internal control panel, screw drive, rolling guide shoes, automatic double doors, silent brake, elevator door safety lock, etc
- Certified with EU CE, ISO9001 International Quality Management System, TÜV Rheinland, Canadian CSA certificates and other authoritative certifications.
- Meets stringent European standards EN81-41 and European Machinery Directive 2006/42/EC."



EN81-41



2006/42/EC



HE lift dimensions: width x depth mm

Mini		Max	
HE1000	 Platform size:855*600mm Reserved size:935*1011mm Load Capacity :250kg 2~3P	HE1500	 Platform size:1415*1075mm Reserved size:1495*1486mm Load Capacity :400kg 4~6P
Reserved width:935mm B door size: 660mm		Reserved width:1495mm B door size: 900mm	
Reserve depth:1246mm S AC door size:660mm		Reserve depth:1386mm M AC door size:800mm	
		Reserve depth:1486mm L AC door size:900mm	
HE1000	 Platform size:855*835mm Reserved size:935*1246mm Load Capacity :250kg 2~3P	 Platform size:855*975mm Reserved size:935*1386mm Load Capacity :250kg 2~3P	 Platform size:855*1075mm Reserved size:935*1486mm Load Capacity :250kg 2~3P
HE1100	 Platform size:995*835mm Reserved size:1075*1246mm Load Capacity :250kg 2~3P	 Platform size:995*975mm Reserved size:1075*1386mm Load Capacity :400kg 4~6P	 Platform size:995*1075mm Reserved size:1075*1486mm Load Capacity :400kg 4~6P
HE1200	 Platform size:1095*835mm Reserved size:1175*1246mm Load Capacity :400kg 4~6P	 Platform size:1095*975mm Reserved size:1175*1386mm Load Capacity :400kg 4~6P	 Platform size:1095*1075mm Reserved size:1175*1486mm Load Capacity :400kg 4~6P
HE1300	 Platform size:1215*835mm Reserved size:1295*1246mm Load Capacity :400kg 4~6P	 Platform size:1215*975mm Reserved size:1295*1386mm Load Capacity :400kg 4~6P	 Platform size:1215*1075mm Reserved size:1295*1486mm Load Capacity :400kg 4~6P
HE1400	 Platform size:1315*835mm Reserved size:1395*1246mm Load Capacity :400kg 4~6P	 Platform size:1315*975mm Reserved size:1395*1386mm Load Capacity :400kg 4~6P	 Platform size:1315*1075mm Reserved size:1395*1486mm Load Capacity :400kg 4~6P
HE1000	Reserved width:935mm B door size: 660mm		
HE1100	Reserved width:1075mm B door size: 800mm		
HE1200	Reserved width:1175mm B door size: 900mm		
HE1300	Reserved width:1295mm B door size: 900mm		
HE1400	Reserved width:1395mm B door size: 900mm		

Main function configuration table

Product	Configuration description	Product	Configuration description
Drive Mode	Screw Nut Drive Control	Door Lock System	Electronic and Mechanical Safety Interlock
Control System	SSID Intelligent Control System	Emergency Brake	Respond to All Emergencies
Door Lock System	Electronic and Mechanical Safety Interlock	Control Panel	Touch Panel, Precise Control, Easy Operation
Silent Brake System	SSG Brake System	Platform Safety Frame	Emergency Stop on Touch
Rolling Guide Shoes	Silent Operation, No Lubrication	Speed	Standard: 0.15m/s Optional: 0.3m/s
Automatic Lubrication System	Continuous Lubrication, Extends Core Components' Lifespan	Shaft Profiles	Using High Grade (6005-T5) Aerospace Aluminum Profiles
Wireless Emergency Communication	Can Store 3 Emergency Contact Numbers, One-touch Dial	Shaft Glass	Using Double-layer Laminated Explosion-proof Tempered Glass (5mm + 0.76mm + 5mm)
Automatic Leveling on Power Outage	Dual Protection (Battery + Mechanical Handle)	Sustainability	95% of Product Components are Recyclable
Touch Control External Call	Precise Control, Easy Operation	Technical Standards	Referencing European Standards EN81-41, European Machinery Directive 2006/42/EC
Built-in Functions	SAFS Full Safety System, ID Intelligent Elevator Door, BASS Battery Monitoring System, OLP Overload Protection, UPS Backup Power Emergency Descent, etc.		

TELEPHON

02-0057916

ADD DRESS

88 AP Nakarin Bldg., 20th Floor, Room no.4, Soi Lasalle 58, Bangna-Tai, Bangna,
Bangkok 10260 Tel : +66-65-098-9909 , Tel: +662-005-7916

